




DRESS ADA

XS - 3XL

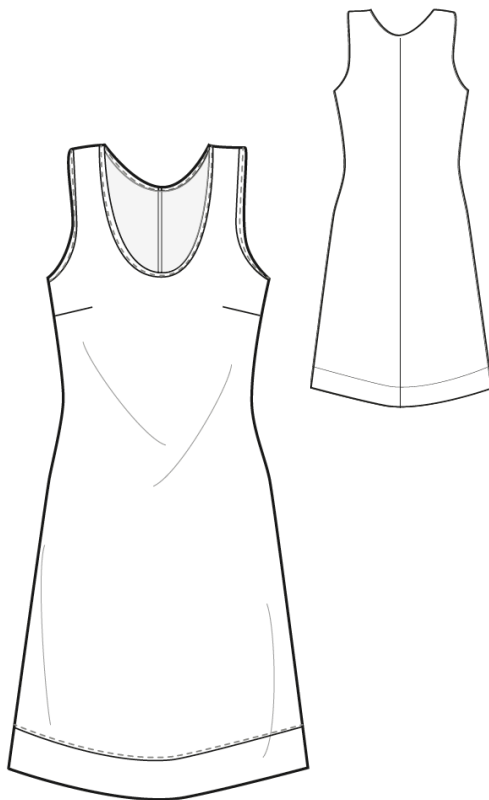

Dress ADA

Slightly flared dress with bust darts. Neck and armholes can be edged with bias tape or sewn with trim.

Length from shoulder approx. 103 cm

CONTENT

- Multi-size pattern in sizes: XS - 3XL
- Illustrated sewing instructions
- Print-your-size: PDF with sizes on several levels

WHAT YOU NEED

- Mediumweight fabrics: cotton, poplin, viscose, silk, linen, rayon, light twill, light corduroy, jacquard or blended fabric
- thread
- bias tape approx. 2m | 2 1/4yd
- or extra fabric for facing and interfacing (0.4m | 1/2yd)

FABRIC REQUIREMENTS

fabric width		80 cm / 35in	110 cm / 43in	140 cm / 55in
XS-S	dress	2.2m / 2 1/2yd	1.3m / 1 1/2yd	1.1m / 1 1/4yd
	extra hem	0.5m / 2/3yd	0.5m / 2/3yd	0.25m / 1/3yd
M	dress	2.1m / 2 1/2yd	1.4m / 2 5/8yd	1.1m / 1 1/4yd
	extra hem	0.5m / 2/3yd	0.5m / 2/3yd	0.25m / 1/3ydd
L	dress	2.2m / 2 1/2yd	1.4m / 1 5/8yd	1.1m / 1 1/4yd
	extra hem	0.5m / 2/3yd	0.5m / 2/3yd	0.25m / 1/3yd
XL-3XL	XL dress	2.3m / 3 1/4yd	1.5m / 1 2/3yd	1.4m / 1 5/8yd
	2XL dress	2.4m / 3 1/4yd	1.6m / 1 3/4yd	1.6m / 1 3/4yd
	3XL dress		1.8m / 2yd	1.7m / 1 7/8yd
	extra hem	0.5m / 2/3yd	0.5m / 2/3yd	0.5m / 2/3yd

SEWING PATTERN
by Stefanie Kroth

www.so-pattern.com

PRE-WASH

Please note, that some fabrics intend to shrink in the first washing and calculate 10% extra fabric.

All pattern pieces include 1cm/3/8in seam allowance.

Original measurements in cm/m, inches and yards are closest approximation.

Cut out the pattern pieces according to your size, place on your fabric and make sure to trace all markings (e.g. notches, darts, etc). Then cut out the fabric.

CUTTING LAYOUT

Fabric

- Front x1 on the fold
- Back x2 mirrored (1x left, 1x right)
- Extra-Hem x1 on the fold
- Front facing x1 on the fold
- Back x2 mirrored (1x left, 1x right)

Fusible interfacing (only for lightweight fabric)

- Front facing x1 on the fold
- Back x2 mirrored (1x left, 1x right)


Iron fusible interfacing onto the required parts according to the manufacturer's instructions.





Dress Ada with bias


1. Stitch bust darts and press.
2. Place the outside front and back together, sew along the shoulder seam and clean-finish the raw edge. Press the seam allowance towards the back.
3. Attach the bias binding to neckline and armholes.
4. Sew side seams and finish seam allowance. Press towards the back. Fix seam allowance towards the back in the armhole with a few small stitches.

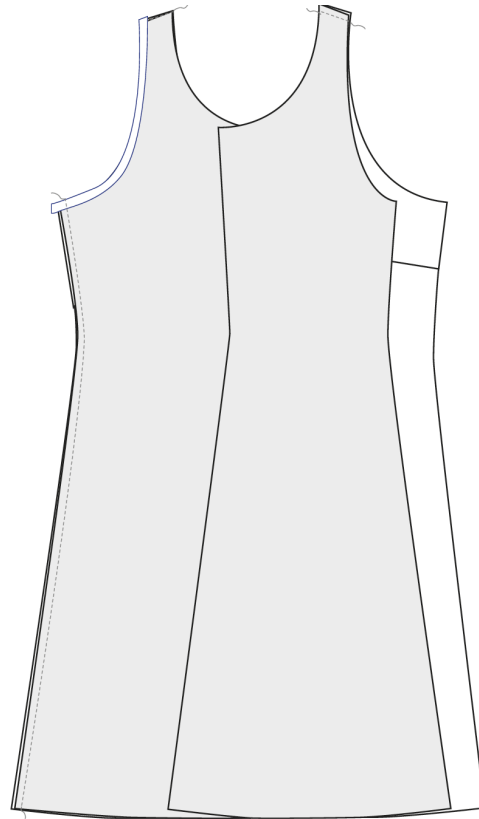

6. Sew center back with the right sides together.


-> FITTING <-

Finish seam allowance press towards left. Fix it on this side with a few small stitches on the neck and hem points so they lie flat.

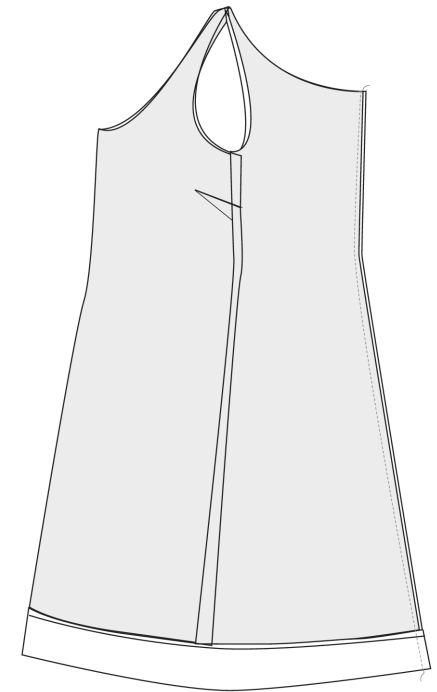

-> It's a wrap!

5. Fold and press extra hem in half with the with the right side outside. Place and sew the extra hem onto the hemline of the dress and finish seam allowance. Press seam allowance towards the top.

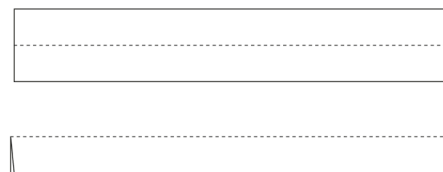

Edge stitch from the right side.



**Enjoy your new garment!
Any questions?**

- Instagram: #sopattern #so_ada
- facebook-Gruppe: SO Pattern Schnittmuster nähen
- Pinterest: @sopattern #so_ada

Dress Ada with facing

1. Stitch bust darts and press.

2. Front facing: Finish lower edge.

Sew facing to front on neckline and armholes.

Clip seam allowance – but not too much – so neckline and armhole lie flat after turning.



Press neckline and armhole.

3. Back: Finish both seam allowances of center back. Sew center back, press seam allowances apart.

4. Back facing: Finish Center back and lower edge. Sew center back, press seam allowances apart.


5. Sew back facing to back at armholes. Clip seam allowance (but do not turn).

6. Place front on back, right sides together and slip front between back and back facing. Pin front straps on back shoulder.

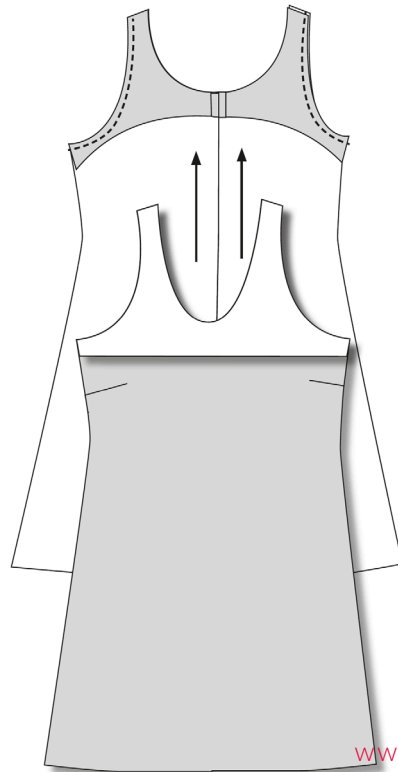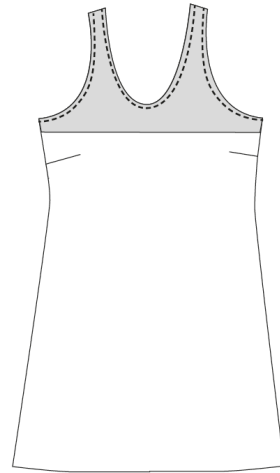

7. Sew front to back at shoulders and back neckline in one go.

Clip neck seam allowance, turn and press.

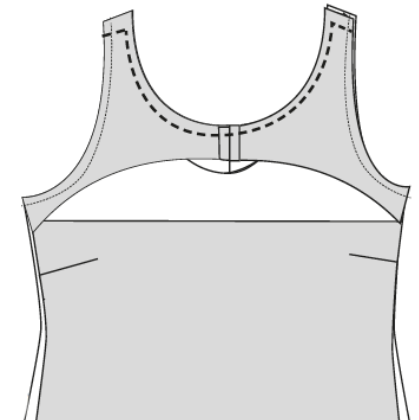


8. Finish side seam allowances. Sew side seams (back/front and facings in one go) and press apart.


9. Fix facings in the side seam with a few small stitches.

You can make this almost invisible if you sew in the seam on the outside of the dress.


So the facing will stay inside the dress.

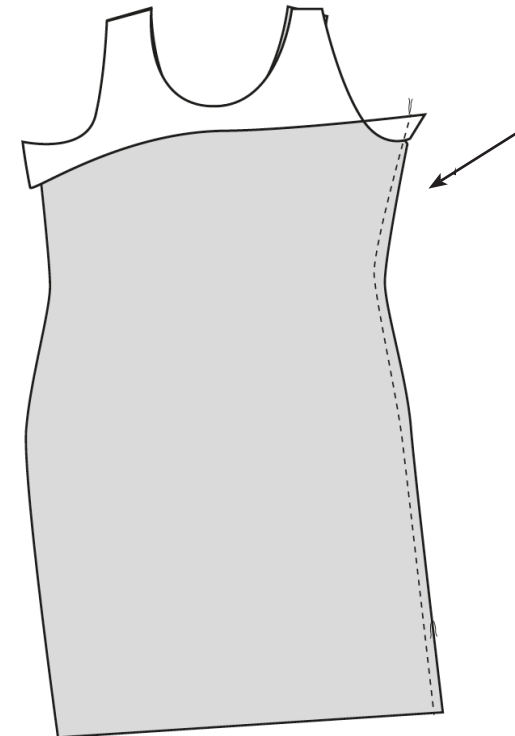

10. Fold and press extra hem in half with the with the right side outside.



Sew the short edges and press seam allowance apart.



11. Place and sew extra hem onto the hemline of the dress and finish seam allowance. Press seam allowance towards the top.




Edge stitch from the right side.



-> It's a wrap!



Enjoy your new garment!
Any questions?


-  Instagram: #sopattern #so_ada
-  facebook-Gruppe: SO Pattern Schnittmuster nähen
-  Pinterest: @sopattern #so_ada

SIZE CHART

To find your size, measure your bust, waist and hip measurements, whilst dressed in your underwear, to get accurate measurements.

Choose the pattern size based on your bust size. If the waist/hip measurements for that size are vastly different to yours, blend between sizes.

BODY MEASUREMENTS in cm inch	XS	S	M	L	XL	2XL	3XL	4XL	5XL
1. bust	82 32.3	86,5 34.1	92 36.2	98 38.6	106 41.7	115 45.3	124 48.8	133 52.4	142 55.9
2. waist	66 26	70,5 27.8	76 29.9	82 32.3	90 35.4	99 39	108 42.5	117 46.1	126 49.6
3. hip	91 35.8	95,5 37.6	101 39.8	107 42.1	114,5 45.1	123 48.4	131 51.6	139 54.7	147,5 58.1
4. shoulder to waist (front)	44 17.3	45 17.7	45,5 17.9	46 18.1	47 18.5	48 18.9	49 19.3	50 19.7	51,5 20.3
5. shoulder to bust	27 10.6	27 10.6	28 11	29 11.4	30 11.8	31 12.2	32 12.6	33 13	34,5 13.6
6. upper arm girth	26 10.2	27,5 10.8	29,5 11.6	31,5 12.4	34 13.4	37 14.6	40 15.7	43 16.9	46 18.1
7. waist to floor	105 41.3	106 41.7	106 41.7	107 42.1	108 42.5	109 42.9	110 43.3	110,5 43.5	111 43.7
8. thigh circumference	56 22	58 22.8	60,5 23.8	63 24.8	66 26	69,5 27.4	73 28.7	76 29.9	79,5 31.3
9. rise (all-around)	64 25.2	65,5 25.7	68 26.8	70,5 27.6	74 29.1	78 30.7	82 32.3	85,5 33.7	89,5 35.2

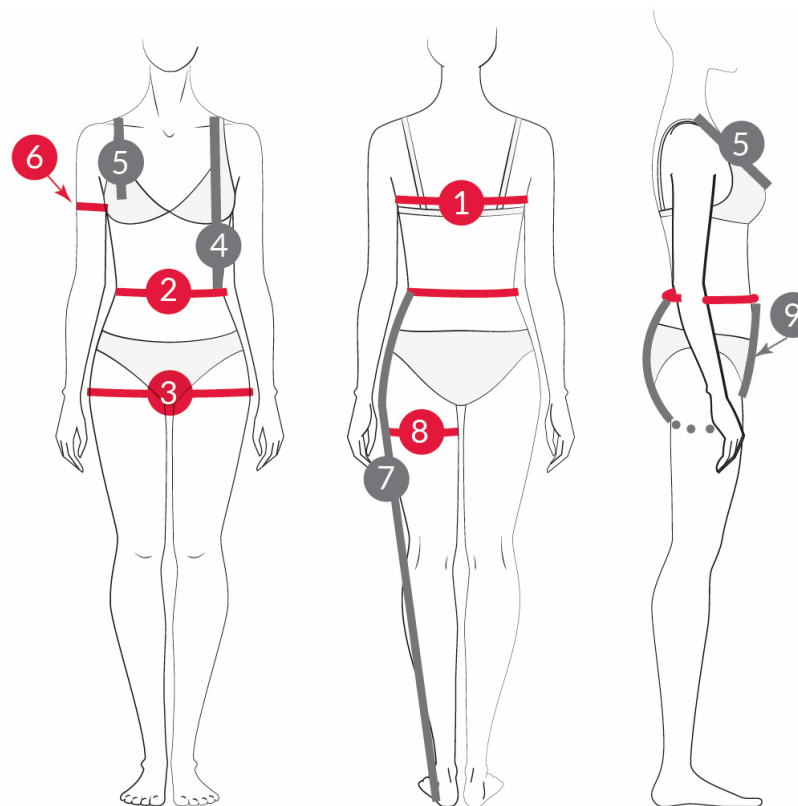

PUBLISHED BY

SO Pattern
Pattern-Design Sonja Stern
Kurf 11a
83093 Bad Endorf
sonja@so-pattern.com
www.so-pattern.com



facebook.com/sopattern



www.instagram.com/so_pattern



www.pinterest.de/sopattern

All rights reserved. Pattern for private use only. Contact shop@so-pattern.com to purchase a commercial licence. Mass production is prohibited. No part of the instructions and pattern may be reproduced in any way, including copying or passing on. SO Pattern does not accept any liability for mistakes in the instructions.

© Stefanie Kroth 2014.


PRINTING YOU PDF

Print at actual size/100% scale and choose horizontal orientation. Use a colour printer as each size is in a different colour. Measure the 5 x 5cm/2x2in test square to ensure that your pattern printed at the correct scale.

Find multiple lines confusing?

Just print the size you need:

- open PDF in Acrobat Reader/Pro
- deactivate unwanted sizes/layers
- print only visible layers

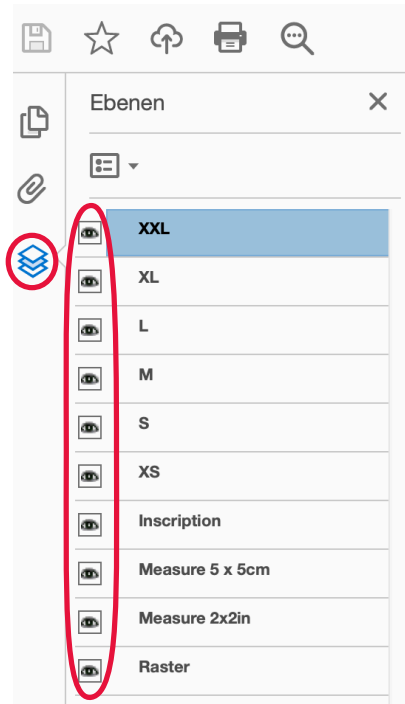

TAPING THE PATTERN TOGETHER

Tape the rows together, starting in alphabetical and numerical order with A1 in the top left corner. Combine the rows as shown on the diagram. Now cut out your pattern pieces.

